Locks for fire resistant doors



CERTIFICAZIONE DI PRODOTTO
PRODUCT CERTIFICATION

CERTIFICATION

CERTIFICATION

CONTROCATE

CONTROCATE

CONTROCATE

CONTROCATE

SEE SECRETATURE S.p.A.

Via San Girculamo, 13 - 20055 PISCONE (BIS) ITALY

CONTROCATE IN CONTROCATE

PRODOTTI CON PROPRIETA CIRCA TRICATE

PRODOTTI CON PROPRIETA CIRCA TRICATE

CONTROCATE CONTROCATE

CONTROCATE

CONTROCATE

CONTROCATE

CONTROCATE

CONTROCATE

CONTROCATE

CONTROCATE

CONTROCATE

CONTROCATE

CONTROCATE

CONTROCATE

CONTROCATE

CONTROCATE

CONTROCATE

CONTROCATE

CONTROCATE

CONTROCATE

CONTROCATE

CONTROCATE

CONTROCATE

CONTROCATE

CONTROCATE

CONTROCATE

CONTROCATE

CONTROCATE

CONTROCATE

CONTROCATE

CONTROCATE

CONTROCATE

CONTROCATE

CONTROCATE

CONTROCATE

CONTROCATE

CONTROCATE

CONTROCATE

CONTROCATE

CONTROCATE

CONTROCATE

CONTROCATE

CONTROCATE

CONTROCATE

CONTROCATE

CONTROCATE

CONTROCATE

CONTROCATE

CONTROCATE

CONTROCATE

CONTROCATE

CONTROCATE

CONTROCATE

CONTROCATE

CONTROCATE

CONTROCATE

CONTROCATE

CONTROCATE

CONTROCATE

CONTROCATE

CONTROCATE

CONTROCATE

CONTROCATE

CONTROCATE

CONTROCATE

CONTROCATE

CONTROCATE

CONTROCATE

CONTROCATE

CONTROCATE

CONTROCATE

CONTROCATE

CONTROCATE

CONTROCATE

CONTROCATE

CONTROCATE

CONTROCATE

CONTROCATE

CONTROCATE

CONTROCATE

CONTROCATE

CONTROCATE

CONTROCATE

CONTROCATE

CONTROCATE

CONTROCATE

CONTROCATE

CONTROCATE

CONTROCATE

CONTROCATE

CONTROCATE

CONTROCATE

CONTROCATE

CONTROCATE

CONTROCATE

CONTROCATE

CONTROCATE

CONTROCATE

CONTROCATE

CONTROCATE

CONTROCATE

CONTROCATE

CONTROCATE

CONTROCATE

CONTROCATE

CONTROCATE

CONTROCATE

CONTROCATE

CONTROCATE

CONTROCATE

CONTROCATE

CONTROCATE

CONTROCATE

CONTROCATE

CONTROCATE

CONTROCATE

CONTROCATE

CONTROCATE

CONTROCATE

CONTROCATE

CONTROCATE

CON

All ISEO panic and emergency exit devices with antibacterial coating AntiGerm have obtained the volountary certification ICIM 021AW/0



In line with its attention to safety, ISEO has decided to add this measure to a device which is always present in public environments and in all those places where hygiene and healthcare is a basic requirement: hospitals, clinics, treatment homes, but also child care centres and nursery schools.

Therefore, the panic function is enriched with the antibacterial protection, AntiGerm*, whose performance is certified by Padova University Molecular Medicine Department.

The antibacterial treatment action is permanent and does not require special maintenance. The constant release of silver ions ensures top efficiency throughout the product life, even in case of surface scratches.

*Antibacterical protection for panic exit devices and accessories (except for Stainless steel/PVD finishes).



Certifications





Certifications for fire resistant locks 214* e 216* series

EN12209

DIN 1825



ed attesta la conformità dal produ l'his certificate has been squari e	conformities a quantity prescription delificated part 2 instinues (s) del 1998 21 y conformities quantities and Art.1, Art.2 and allegation A. del 1998 21 y on conformity to what prescribed by the Art.5 part 2 instinut s) of the 1999 29 aport of described deline to the Art.1, Art.2 and attachment A. of 2018 25	gelle 1983, n°246 (Directive 69/109/CEE) N/1981, n°246 (Directive 69/109/EC) and			
ATTESTATO N°	2233 - CPD - 2010	CERTIFICATE N			
Organismo notificato		Notified Body			
ICIM S.p.A. – Piazza Don M	apelli, 75 - 20099 SESTO SAN GIOVANNI (MI) - ITALY	Identification number: 0425			
Dati Fabbricante		Manufacturer			
	SERRATURE S.p.A Via San Girolamo, 13 - PISOGNE (6				
Unità operativa (5	EO SERRATURE S.p.A Via San Girolamo, 13 - PISOGNE (BS)	ITALY Operative unit			
Dati prodotto		Product			
Denominazione	SENCY EXIT DEVICES OPERATED BY A LEVER HANDLE Serie 2126, 2127.	Denomination			
	Serratura I Lock: 2131"65", 2127"65". Accessori/Accessories: 0321", 0322". Accessori/Accessories: 0321", 0322". Ileva / Lever Handle: 0324", 103065809274012, 103 inic / Series D110, D115, D116, D330, D335, D410, D4				
	Accessorii/Accessories: 0321***, 0327**. leva / Lever Handle: 0324**, 103046500274012, 10: ir / Series D110, D115, D116, D330, D335, D410, D4				
Sistema di attestazione della Norma di rifermento	Accessori(Accessories: 0321**, 0327**, a leva / Lever Handle: 0324**, 10304550274012, 10: ile / Series D[10, D115, D115, D330, D335, D410, D4 conformità 1 EN 179.2006	15, D490. Attestation of conformity Standard			
Ser Sistema di attestacione della	Accessori/Accessories: 0321**, 0327**,	Affectation of conformity Standard Classification			
Sistema di attestazione della Norma di rifermento	Accessori(Accessories: 0321**, 0327**, a leva / Lever Handle: 0324**, 10304550274012, 10: ile / Series D[10, D115, D115, D330, D335, D410, D4 conformità 1 EN 179.2006	15, D490. Attestation of conformity Standard			
Sotema di atestacione della Norma di riterimento Classificazione	Accessor/Accessor/acc	Affectation of conformity Standard Classification			

Certifications for fire resistant locks 214* and 212* series with emergency function, EN 179 standard

EN 179










) <u>|</u> Min. ord.
Multiple
package
Single
package
Status



Palmo for main and secondary leaf





Palmo panic exit device for FIRE RESISTANT doors, **FOR MAIN AND SECONDARY LEAF, REVERSIBLE**, can be used with panic exit mortice locks and counterlocks with 9 mm handle follower. Center distance mm 72, with handle follower rotation **30°.** BLACK painted. Templates. Assembly instructions.

SQUARE SPINDLE NOT INCLUDED. CE EN1125 marking and ICIM product certification.

Accessories to be ordered separately:

Lock 2141**65* - Counterlock 2126**65* - Counterlock 2127**65*

Oval bar 9459* - Striking plate 032094

Kit of thermoexpanding gaskets 94000020.

Microswitch 94100160.

Square spindle 947910 - 947920 - 947930 - Accessories 0321*4

PVD finish	949000020379	D	1	- 1	NO
Painted BLACK	949000050379	Α	1	- 1	YES

Certifications





Certifications of the devices according EN1125 standard

The ICIM certification as per EN 1125 is only valid if the operating bar in this page is used in conjunction with ISEO locks, stricking plates, counterlocks and accessories as indicated in the next page. Whoever uses a certified panic exit device in conjunction with locks, counterlocks, accessories and/or

stricking plates different from the ones specified by ISEO shall be responsible for compliance with EN 1125.

All the updated certificates can be downloaded from our web site: www.iseoserrature.it













Palmo for main and secondary leaf

The panic exit device for fire resistant doors with MORTICE LOCK FOR MAIN LEAF is made up of a horizontal bar which operates the locking mechanism through the handle follower. The operation of the bar causes the rotation of the handle follower, unlocks the lock and opens the door. Reversible mechanism for usage on right or left handle doors. All versions can be used with a microswitch that signals door openings.

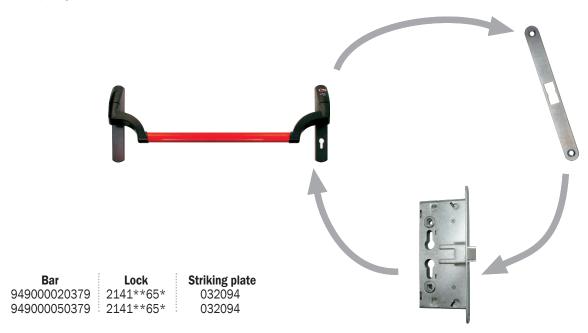

The panic exit device for fire resistant doors with MORTICE COUNTERLOCK FOR SECONDARY LEAF is made up of a horizontal bar which operates the locking mechanism through the handle follower.

The operation of the bar causes the rotation of the handle follower of the counterlock, by which the upper and the lower rod will move inside, the latchbolt of the panic exit lock in the main leaf will be released and both leafs can be opened. Reversible mechanism for usage on right or left handed doors. All versions can be used with a microswitch that signals door openings.

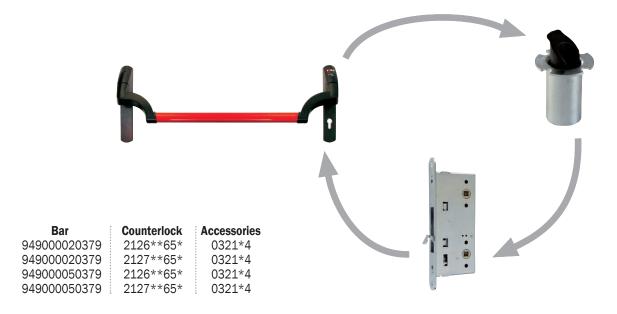





Multiple package Single package



NO


Accessories

◀	1130	Horizontal oval bar for panic exit devices IDEA - Palmo SERIES 94C - 9490. Length mm 1130						
→ 19		INOX	945922	Α	1	_	1	NO
		PAINTED GREY	945923	Α	1	-	1	YES
		PAINTED WHITE	945924	В	1	-	1	YES
		PAINTED BLACK	945925	В	1	-	1	YES
		PAINTED RED	945928	Α	1	_	1	YES
		PAINTED GREEN	945929	D	1	-	1	YES



Horizontal oval bar for panic exit devices IDEA - Palmo SERIES 94C - 9490.

Length mm 1330





Microswitch, to be fitted in the IDEA - Palmo SERIES 94C - 9490.

Can be used in conjuction with security systems.

Fixing screws. Instructions sheet. 94100160 D 1 - 1

